


Form 0367 - Programming Instructions for Amadas part # 16441 for Different Machine Applications
 16441 replaces 16395,16942 and 15515 when used for
Peanut Combines.
 3/18/2001

In order for the display to show the correct values, the DT8 Red Lion Rate Meter (Amadas part number: 16395) must be programmed before installation. Below are the DIP Switch settings for your application.

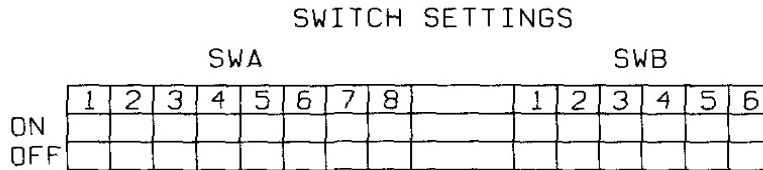

Machine	"ON" DIP Switches	
	SWA	SWB
8557 2-Row Peanut Combines; <1990 (up to Serial #280000)	1,4,5,6,8	
4&6 Row Pull-Type Peanut Combines; 1990&1993 machines (Serial #280000-310000) [S16942]	1,4,5,6,8	
4&6 Row Pull-Type Peanut Combines; 1994 to 2004 machines (Serial #320000-429999) [S16942-1]	1,2,4,5,6,7	1
4&6 Row Pull-Type Peanut Combines; (Serial #430000-Present)	1,2,4,5,6,7	1